

# BTJ Photovoltaic Cell

Advanced Triple-Junction Solar Cell for Space Applications




SPACE PHOTOVOLTAICS



## Typical Performance Data

| Electrical Parameters @ AM0 (135.3 mW/cm <sup>2</sup> ) | 28°C                    |
|---|-------------------------|
| BOL Efficiency at Maximum Power Point                   | 28.5%                   |
| Voc   | 2.70V                   |
| Jsc   | 17.1 mA/cm <sup>2</sup> |
| Vmp   | 2.37V                   |
| Jmp   | 16.3 mA/cm <sup>2</sup> |

## BTJ Cell Structure

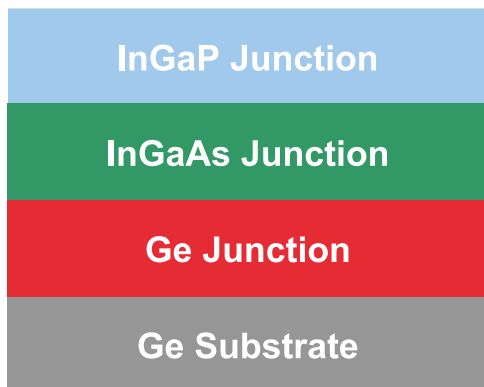


## 28.5% Minimum Average Efficiency

### Features & Characteristics

- Lowest solar cell mass of 84 mg/cm<sup>2</sup>
- 2nd Generation Triple-Junction (BTJ) InGaP/InGaAs/Ge Solar Cells with n-on-p Polarity on 140- $\mu$ m Uniform Thickness Substrate
- Fully space-qualified with proven flight heritage
- Excellent radiation resistance with P/Po = 0.89 @ 1-MeV, 5E14 e/cm<sup>2</sup> fluence
- Designed to accept corner-mounted silicon bypass diode for individual cell reverse bias protection
- Good mechanical strength for reduced attrition during assembly and laydown
- Weldable or Solderable contacts
- Standard and custom sizes available

## Typical BTJ Illuminated I-V Plot

Solar Cell Area = 26.6 cm<sup>2</sup>

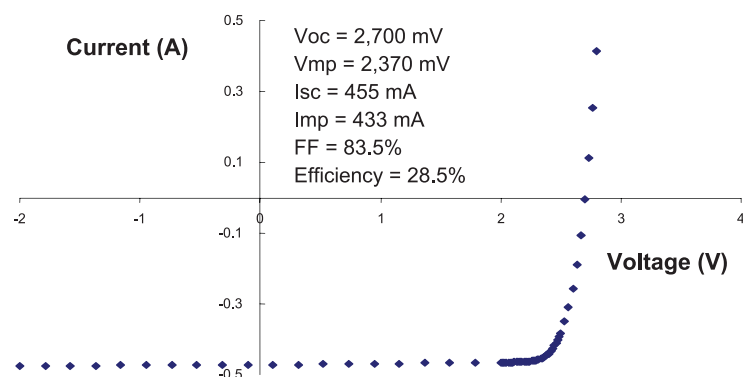

# BTJ Photovoltaic Cell

Triple-Junction Solar Cell for Space Applications



SPACE PHOTOVOLTAICS

## Optional Covered Interconnect Cell (CIC) Configurations



## Key Space Qualification Results

| Test Performed  | Industry Quality Standard      | Typical Test Results     |
|---|--------------------------------|--------------------------|
| Metal Contact Thickness   | 4-8 $\mu\text{m}$              | 6 $\mu\text{m}$          |
| Dark Current degradation after reverse bias   | $\Delta I_{\text{spec}} < 2\%$ | $< 0.4\%$                |
| Electrical performance after 2,000 thermal cycles -180°C to +95°C                                   | $< 2\%$                        | $< 0.8\%$                |
| High-Temperature Anneal at 200°C for >5,000 hrs.  | $< 2\%$                        | No measurable difference |
| Contact pull strength   | >300 grams                     | >1000 grams              |
| Electrical performance degradation after 40 day humidity exposure at 60°C and 95% relative humidity | $< 1.5\%$                      | $< 0.4\%$                |

■ For complete qualification results, please request EMCORE's ATJ Qual Report EWRP036

## About EMCORE Corporation



### Emcore Photovoltaics Albuquerque, NM

- Incorporated in 1984
- Appx. 900 Employees
- Nasdaq: EMKR

## Radiation Performance at 1 MeV Electron Irradiation, EOL/BOL Ratios

| Fluence ( $\text{e}/\text{cm}^2$ ) | Voc  | Isc  | Vmp  | Imp  | Pmp  | Efficiency |
|------------------------------------|------|------|------|------|------|------------|
| 5E 13                              | 0.96 | 1.00 | 0.97 | 1.00 | 0.97 | 0.97       |
| 1E 14                              | 0.95 | 1.00 | 0.96 | 1.00 | 0.95 | 0.95       |
| 5E 14                              | 0.91 | 0.97 | 0.92 | 0.96 | 0.89 | 0.89       |
| 1E 15                              | 0.90 | 0.95 | 0.90 | 0.93 | 0.84 | 0.84       |

## Temperature Coefficients

| Fluence ( $\text{e}/\text{cm}^2$ ) | $\Delta\text{Voc}/\Delta\text{T}$<br>(mV/°C) | $\text{Jsc}/\Delta\text{T}^{(1)}$<br>( $\mu\text{A}/^\circ\text{C}$ ) | $\text{Vm}/\Delta\text{T}$<br>(mV/°C) | $\text{Jmp}/\Delta\text{T}^{(2)}$<br>( $\mu\text{A}/^\circ\text{Ccm}$ ) | $\text{Eff}/\Delta\text{T}$<br>(abs. % /°C) |
|------------------------------------|--|---|---------------------------------------|---|---|
| BOL                                | -6.0   | +12   | -6.0                                  | +10   | -0.064                                      |
| 1E 15                              | -6.5   | +14   | -6.4                                  | +12   | -0.061                                      |

■ <sup>(1)</sup> Jsc is the symbol for normalized Isc

■ <sup>(2)</sup> Jmp is the symbol for normalized Imp

## Regulatory



EMCORE CORPORATION  
ISO 9001 CERTIFIED



EMCORE PHOTOVOLTAICS  
AS9100 CERTIFIED